

AD-A114 056

DAVID W TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CE--ETC F/6 20/12  
STABILITY MEASUREMENTS OF ALUMINUM-STABILIZED NBTI AND BRONZE M--ETC(U)  
MAR 82 D J WALTMAN, M J SUPERCHYNSKI  
DTNSRDC/PAS-81/33

UNCLASSIFIED

ALL

1 OF 1  
204  
14034

END  
DATE  
FILMED  
05-82  
DTIC

AD A114056

DTNSRDC/PAS-81/33



# DAVID W. TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CENTER

Bethesda, Maryland 20084

STABILITY MEASUREMENTS OF ALUMINUM-STABILIZED  
NbTi AND BRONZE MATRIX Nb<sub>3</sub>Sn POTTED  
SUPERCONDUCTING MAGNETS

by

D. J. Waltman, M. J. Superczynski  
and F. E. McDonald

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

PROPULSION AND AUXILIARY SYSTEMS DEPARTMENT  
RESEARCH AND DEVELOPMENT REPORT

March 1982

DTNSRDC/PAS-81/33




FINAL COPY

STABILITY MEASUREMENTS OF ALUMINUM-STABILIZED NbTi AND BRONZE MATRIX  
Nb<sub>3</sub>Sn POTTED SUPERCONDUCTING MAGNETS

82 04 29 044

## MAJOR DTNSRDC ORGANIZATIONAL COMPONENTS

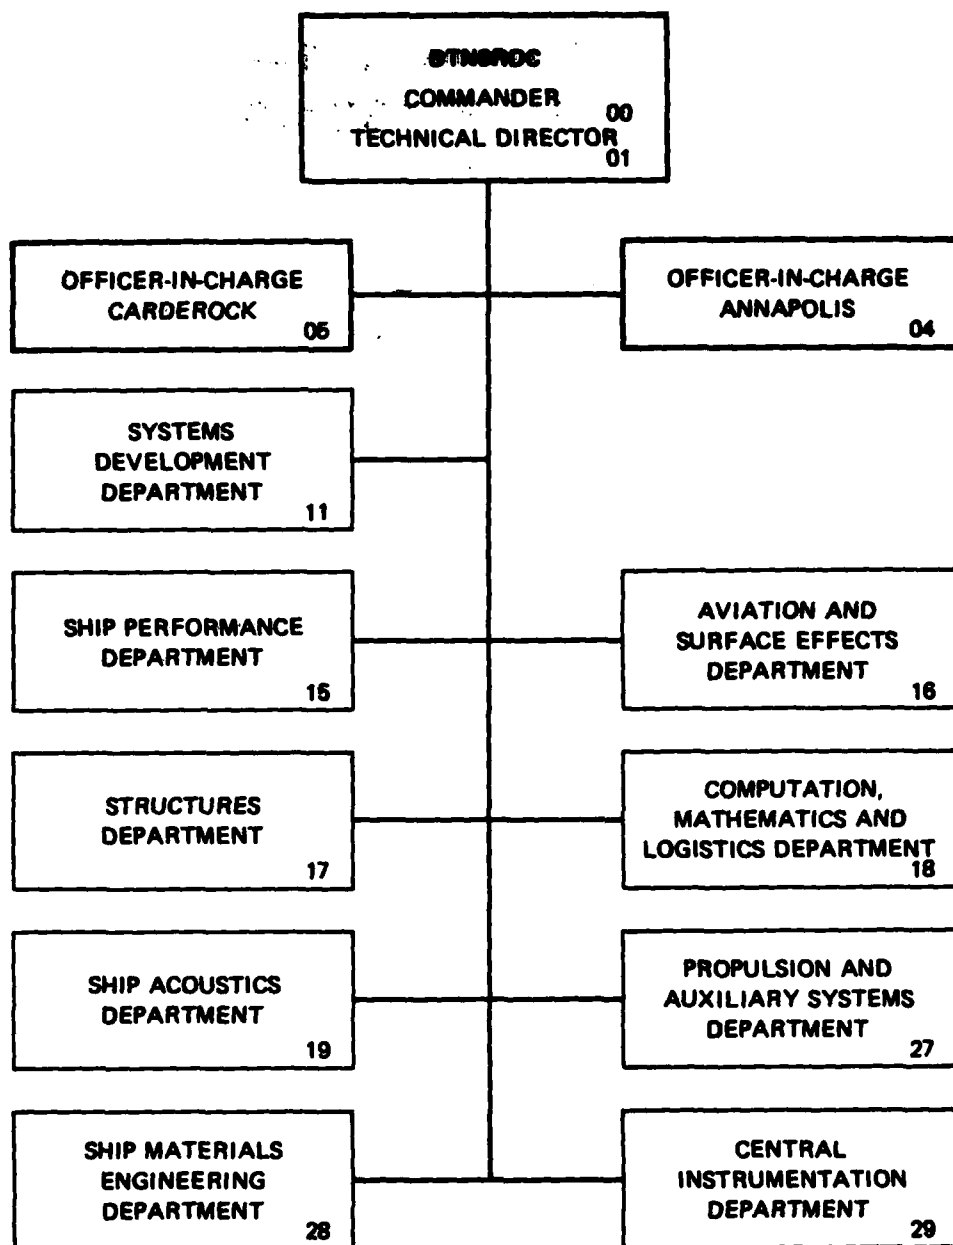

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER PAS-81/33	2. GOVT ACCESSION NO. AD-A114 056	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) STABILITY MEASUREMENTS OF ALUMINUM-STABILIZED NbTi AND BRONZE MATRIX Nb <sub>3</sub> Sn POTTED SUPERCONDUCTING MAGNETS		5. TYPE OF REPORT & PERIOD COVERED Research and Development
6. AUTHOR(s) D.J. Waltman, M.J. Superszynski and F.H. McDonald		7. PERFORMING ORG. REPORT NUMBER
8. PERFORMING ORGANIZATION NAME AND ADDRESS David W. Taylor Naval Ship R&D Center Annapolis, Maryland 21402		9. CONTRACT OR GRANT NUMBER(s)
10. CONTROLLING OFFICE NAME AND ADDRESS Naval Sea Systems Command (SEA 05R11) Washington, D.C. 20362		11. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS See Reverse Side
12. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. REPORT DATE March 1982
		14. NUMBER OF PAGES 19
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		16. DECLASSIFICATION/DOWNGRADING SCHEDULE
17. DISTRIBUTION STATEMENT (of this Report)  APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.		
18. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
19. SUPPLEMENTARY NOTES		
20. KEY WORDS (Continue on reverse side if necessary and identify by block number)  Superconductivity Stability Magnets Superconductors		
21. ABSTRACT (Continue on reverse side if necessary and identify by block number)  Two epoxy-impregnated superconducting test coils, containing 0.635-centimeter electrical heaters imbedded in their windings, have been constructed to measure the minimum energy-to-quench as a function of operating current at various fixed levels of magnetic field strength. One test coil was wound with aluminum-stabilized NbTi superconducting wire and the other coil was wound with bronze matrix Nb <sub>3</sub> Sn superconducting wire. The results of the energy-to-quench measurements are (Continued on reverse side)		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE  
S/N 0102-014-6001

UNCLASSIFIED  
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Block 10 (Continued)

Program Element 63508N  
Project S03805L  
Task Area SF43431503  
Task 23044  
Work Unit 1-2706-103

Block 20 (Continued)

presented for both these test coils, and these results are compared to the previous measurements made for copper-stabilized NbTi test coils.



Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	<input type="checkbox"/>
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

## TABLE OF CONTENTS

	Page
LIST OF FIGURES . . . . .	111
LIST OF ABBREVIATIONS . . . . .	v
ABSTRACT . . . . .	1
ADMINISTRATIVE INFORMATION . . . . .	1
INTRODUCTION . . . . .	1
SUPERCONDUCTOR FABRICATION . . . . .	2
BRONZE Nb <sub>3</sub> Sn SUPERCONDUCTOR FABRICATION . . . . .	2
ALUMINUM MATRIX NbTi SUPERCONDUCTOR FABRICATION . . . . .	3
TEST MAGNET CONSTRUCTION . . . . .	3
EXPERIMENTAL METHOD . . . . .	4
DISCUSSION OF RESULTS . . . . .	5
CONCLUSIONS . . . . .	6
REFERENCES . . . . .	17

## LIST OF FIGURES

1 - Cross-Sectional View of Nb <sub>3</sub> Sn/CuSn Superconducting Wire . . . . .	7
2 - Nb <sub>3</sub> Sn/CuSn Superconducting Wire Fabrication Process . . . . .	8
3 - Cross-Sectional View of NbTi/Al Superconducting Wire . . . . .	9
4 - NbTi/Al Superconducting Wire Fabrication Process . . . . .	10
5 - Superconducting Test Coil Construction and Heater Location . . . . .	11
6 - Magnet Assembly for Energy-to-Quench Measurements . . . . .	12

	Page
7 - Experiment Instrumentation and Power Supply Connection Diagram . . . . .	13
8 - Critical Current ( $I_c$ ) Measurement Results for the NbTi/Al and Nb <sub>3</sub> Sn/CuSn Test Coils . . . . .	14
9 - Energy-to-Quench Versus $I/I_c$ for Nb <sub>3</sub> Sn/CuSn, NbTi/Al, and NbTi/Cu Test Coils . . . . .	15

# LIST OF ABBREVIATIONS

Al	Aluminum
°C	Degrees Celsius
cm	Centimeter
CuSn	Copper tin
d-c	Direct-current
I	Magnet operating current
I <sub>c</sub>	Superconductor critical current
ID	Inside diameter
J	Joules
K	Kelvin
μm	Micrometer
μsec	Microsecond
mm	Millimeter
Nb <sub>3</sub> Sn	Niobium tin
NbTi	Niobium titanium
OD	Outside diameter
T	Tesla



## ABSTRACT

Two epoxy-impregnated superconducting test coils, containing 0.635-centimeter electrical heaters imbedded in their windings, have been constructed to measure the minimum energy-to-quench as a function of operating current at various fixed levels of magnetic field strength. One test coil was wound with aluminum-stabilized NbTi superconducting wire and the other coil was wound with bronze matrix Nb<sub>3</sub>Sn superconducting wire. The results of the energy-to-quench measurements are presented for both these test coils, and these results are compared to the previous measurements made for copper-stabilized NbTi test coils.

## ADMINISTRATIVE INFORMATION

The work described in this report was performed as part of the Advanced Electric Propulsion Project, Task Area SF43431503, Task 23044, and was sponsored by the Naval Sea Systems Command (SEA 05R11). The work was accomplished under Work Unit 1-2706-103 in the Electrical Machinery Technology Branch, Electrical Systems Division of the Propulsion and Auxiliary Systems Department at this Center.

## INTRODUCTION

Stable and reliable superconducting magnets for use as the field windings of electric motors and generators are an important consideration for high machinery availability. Because of their compact size, ruggedness of construction, and large energy density, epoxy-impregnated superconducting magnets are being considered for the field windings of superconductive electric machinery.

A major concern with the use of fully potted and trained superconducting magnets is their stability when operating in an adverse environment. Heat energy can be imparted to the superconductor of the magnet from external mechanical disturbances, such as shock and vibration. In addition, energy stored in the magnet composite due to stress concentrations developed during magnet construction and cool-down to 4.2K\* can be released in the coil winding when the coil is energized. If the heat energy released from the various possible sources is sufficiently large, the local temperature rise will drive the superconductor normal, causing the magnet to quench.

---

\* Definitions of abbreviations used are given on page v.

Previous work<sup>1,2\*</sup> performed at this Center has provided stability measurement data for fully potted, superconducting test coils wound with copper-stabilized, multifilament, NbTi superconducting wire. As a continuation and extension of this work, additional stability experiments have been performed using fully potted test coils wound with aluminum-stabilized, multifilament, NbTi, superconducting wire and test coils wound with bronze matrix (CuSn) multifilament, Nb<sub>3</sub>Sn, superconducting wire. The NbTi/Al and Nb<sub>3</sub>Sn/CuSn wire used in the test coils are experimental conductors fabricated to meet specifications developed by researchers at this Center. The interest in these conductors is based on the expected improvement in magnet stability that each conductor should provide compared to copper-stabilized NbTi. The A-15 compound Nb<sub>3</sub>Sn/CuSn superconductor possesses enhanced values of critical temperature, current density, and magnetic field relative to NbTi. The aluminum matrix material of the NbTi/Al wire has improved thermal conductivity and electrical resistivity at 4.2 K compared to standard copper matrix material. Therefore, the purpose of these experiments was to measure the stability of potted test magnets wound with these conductors and to compare the results obtained to the previously measured stability characteristics of NbTi/Cu potted superconducting test coils.

## SUPERCONDUCTOR FABRICATION

### BRONZE Nb<sub>3</sub>Sn SUPERCONDUCTOR FABRICATION

A cross-sectional view of the bronze matrix, multifilament, Nb<sub>3</sub>Sn superconducting wire is shown in Figure 1. The wire is of cabled construction composed of six strands of conductor each having 240 filaments of Nb<sub>3</sub>Sn superconductor with a twist pitch of two per 2.54 cm in a bronze matrix. The cabled conductors are reinforced with a center strand of stainless steel wire and are bonded together with a metal solder filler. The twist pitch of the cabled superconducting strands is 14 per 2.54 cm. The wire is electrically insulated with a spiral wrap of fiber glass cloth.

The fabrication of the Nb<sub>3</sub>Sn/CuSn strands used conventional processing technology for Nb<sub>3</sub>Sn superconductors. The general steps of this process are shown in Figure 2.

---

\* A complete list of references appears on page 17.

## ALUMINUM MATRIX NbTi SUPERCONDUCTOR FABRICATION

A cross-sectional view of the aluminum-stabilized, multifilament, superconducting wire is shown in Figure 3. The method used to fabricate this wire involved the processes shown in Figure 4. First, a composite of multifilament, NbTi superconductor embedded in an aluminum alloy was prepared using conventional techniques. A total of 121 holes were drilled in a 76-mm-diameter by 24-mm-long, 1100 aluminum billet. Rods of Nb 53Ti, 4.8 mm in diameter, were inserted into the holes of the billet. The billet was then extruded to a extrusion ratio of 10. The extruded composite was then inserted in a high-purity (>99.995%) aluminum tube (24.4-mm OD and 19.8-mm ID) which had been fabricated by extrusion from bar stock. The NbTi-1100 aluminum core and high-purity aluminum tube were then assembled in a copper tube of 31.8-mm OD and 25.4-mm ID. The entire composite was then drawn down to its final size of 0.91-mm OD. The outer copper sheath was stripped from the wire using nitric acid, and the wire was heat-treated at 375°C for several hours and then squared to a nominal rectangular cross section of 0.635 x 0.889 mm. The wire, as received from the manufacturer, was not uniform in cross-sectional size and varied in size along the entire length of the conductor. In addition, the wire was not electrically insulated by the manufacturer. Therefore, prior to winding the test coil for the stability measurements, it was insulated by hand coating the wire with varnish electrical insulator, which resulted in a wire of highly nonuniform overall cross section along its length.

## TEST MAGNET CONSTRUCTION

Two test magnets, one wound with the Nb<sub>3</sub>Sn/CuSn wire and the other wound with the NbTi/Al wire were constructed. Both test coils, as shown in Figure 5, are epoxy-impregnated solenoidal coils. The Nb<sub>3</sub>Sn/CuSn magnet is a five-layer coil having a total of 104 electrical turns. The input current lead and first turn of the coil as well as the output current lead and last turn of the coil are made up of one wire of Nb<sub>3</sub>Sn/CuSn and NbTi/Cu soldered together. This was done to assure the mechanical-electrical integrity of the current leads of the coil which are subjected to mechanical abuse during the handling of the coil and installing it in the experimental setup. Similarly, the current leads and first and last turn of the NbTi/Al coil were made with NbTi/Cu wire soldered together with the NbTi/Al wire of the coil. The NbTi/Al coil is a four-layer winding having a total of 47 electrical turns. During the winding of both the Nb<sub>3</sub>Sn/CuSn and NbTi/Al coils,

a multitapped electrical heater fabricated from constantan wire (0.339 ohm/cm) was embedded in each coil. For both coils, the heater was located between winding Layers 2 and 3 and centered along the length of each of the coils. The multitapped heater configuration allowed for the potential use of various lengths of heaters of up to 2.54 cm in length in 0.635-cm increments.

Both coils were constructed using the same methods of winding, fiber glass cloth reinforcement, and vacuum impregnation that were used to construct the NbTi/Cu coils used for previous stability measurements.<sup>2</sup> As shown in Figure 5, the physical size differences in these coils (NbTi/Cu coil is included for comparison) results from the differences in overall cross-sectional size of superconducting wire used for each coil.

#### EXPERIMENTAL METHOD

To measure the stability of each of these test coils at magnetic flux densities of 3 to 5T, each coil was placed in the inner bore of a background magnet, as shown in Figure 6. The superconducting, NbTi, background magnet has an inside diameter of 19.4 cm, an outside diameter of 24.0 cm, and is 9.4 cm in length. Each test magnet, when installed for measurement, is concentrically positioned at the mid-length of the inner bore of the background magnet.

For the experiments to measure the energy-to-quench, the assembly of the test coil and background coil was placed in a liquid helium, cryogenic dewar and cooled from room temperature to 4.2 K. After the background and test magnets reached their superconducting state, they were energized to predetermined operating currents using separate power supplies, as shown in Figure 7.

Prior to performing the energy-to-quench experiments the critical current of each test coil was measured at different levels of magnetic field strength. The results of the measurements are shown in Figure 8.

The objective of the experiment was to measure the minimum energy required to quench the Nb<sub>3</sub>Sn/CuSn and the NbTi/Al magnets for various levels of fixed field strength and for various values of test coil operating current. Therefore, for the experiments, the background magnet was energized to provide a constant background field level, and the coil under testing was energized to an operating current that was a desired percentage of its critical current at the background level.

To quench the test coil with a known amount of electrical energy, a pulse generator and power amplifier system, as illustrated in Figure 7, was used to

deliver a single pulse of known electrical energy to the resistor heater embedded in the test coil. A dummy resistor approximately equivalent to the heater resistance was used to allow measurement of the amplitude and width of the electrical pulse with a calibrated oscilloscope prior to applying the pulse to the heater. The actual test procedure involved maintaining the pulse width at a fixed value of 100 to 300  $\mu\text{sec}$  and adjusting the pulse amplitude to obtain the minimum energy required to quench the coil. Measurements previously reported by Superczynski<sup>2</sup> showed that energy-to-quench remained constant over a pulse width of  $10^2$  to  $10^4$   $\mu\text{sec}$ . For each run of the experiment, the amplitude of the constant width pulse was initially set to a value estimated to be less than that needed to quench the magnet. The pulse amplitude was then increased in small increments until the test magnet quenched.


#### DISCUSSION OF RESULTS

The results of the measurements of the minimum energy required to quench the  $\text{Nb}_3\text{Sn}/\text{CuSn}$  and the  $\text{NbTi}/\text{Al}$  test coils are shown in Figure 9. In the figure, energy-to-quench the test coil, using a 0.635-cm heater, is plotted as a function of the ratio of the test coil operating current to its critical current ( $I/I_c$ ) for the magnet field strengths shown. For purposes of comparison, a plot of previous measurements<sup>2</sup> of the energy-to-quench a  $\text{NbTi}/\text{Cu}$  test coil using a 0.635-cm heater is shown in Figure 9. The results show that the energy-to-quench as a function of  $I/I_c$  for both the  $\text{Nb}_3\text{Sn}/\text{CuSn}$  and  $\text{NbTi}/\text{Al}$  coils is greater than that to quench the  $\text{NbTi}/\text{Cu}$  coil. In the  $I/I_c$  region of 0.3 to 0.9, the energy-to-quench the  $\text{Nb}_3\text{Sn}$  coil is approximately a factor of 3 ( $I/I_c = 0.3$ ) to a factor of 10 ( $I/I_c = 0.9$ ) greater than the energy-to-quench the  $\text{NbTi}/\text{Cu}$  coil. For the  $\text{NbTi}/\text{Al}$  coil, the energy-to-quench is approximately a factor of 30 greater than that of the  $\text{NbTi}/\text{Cu}$  coil over the  $I/I_c$  range of 0.3 to 0.9. But, as can be seen, the measured results for both the  $\text{Nb}_3\text{Sn}/\text{CuSn}$  and  $\text{NbTi}/\text{Al}$  coils do not show a sharp decrease in the magnitude of the energy-to-quench at the higher value of  $I/I_c$  (0.9 and greater) as would be expected. Since there is insufficient data to indicate that the long length current and magnetic field characteristics of the  $\text{Nb}_3\text{Sn}/\text{CuSn}$  superconducting wire or the  $\text{NbTi}/\text{Al}$ , as shown in Figure 8, agree with their short sample wire characteristics, the  $I/I_c$  values used in Figure 9 may not be correct. Because of possible nonuniformity in the cross-sectional area and filament size of the  $\text{Nb}_3\text{Sn}/\text{CuSn}$  wire and the known construction nonuniformity of the  $\text{NbTi}/\text{Al}$  wire, the critical current of each wire at the heater location could be greater than that

measured for the entire coil winding. If this is the case, the actual  $I/I_c$  values would be less than those shown in Figure 9, and the energy-to-quench plots for both coils would shift to the left. This would, therefore, indicate that measurements were not actually obtained at the higher  $I/I_c$  values where the energy-to-quench is expected to rapidly decrease. Another observation from the data results shown in Figure 9 is that the measured values of energy-to-quench for the  $Nb_3Sn/CuSn$  and  $NbTi/Al$  test coils were not dependent upon the magnetic field strength. This differs from the results obtained for the  $NbTi/Cu$  test coil, which indicated that high field magnets are less stable than low field magnets. The reason for this difference is not known.


#### CONCLUSIONS

The measurements of the energy-to-quench a potted test coil wound with  $Nb_3Sn/CuSn$  superconducting wire and a potted test coil wound with  $NbTi/Al$  wire show that both these magnets are more stable compared to coils wound with  $NbTi/Cu$  wire. The  $Nb_3Sn/CuSn$  test coil required values of energy-to-quench over an  $I/I_c$  range of 0.3 to 0.9 of a factor of 3 to 10 more than that of a  $NbTi/Cu$  test coil. The  $NbTi/Al$  test coil required values of energy-to-quench of a factor of 30 more than a  $NbTi/Cu$  test coil over an  $I/I_c$  range of 0.3 to 0.9. Possible nonuniformities in the construction of the  $Nb_3Sn/CuSn$  wire and the known nonuniformities in the construction of the  $NbTi/Al$  wire could modify the results presented due to the possibility that the critical current value of the wire at the heater location of each coil can be higher than the measured value of each coil. The results presented are also based on measurements made with only one coil of each type of wire. A larger data base is needed, with measurements from several coils wound with  $Nb_3Sn/CuSn$  and  $NbTi/Al$  wire, to verify the results presented.

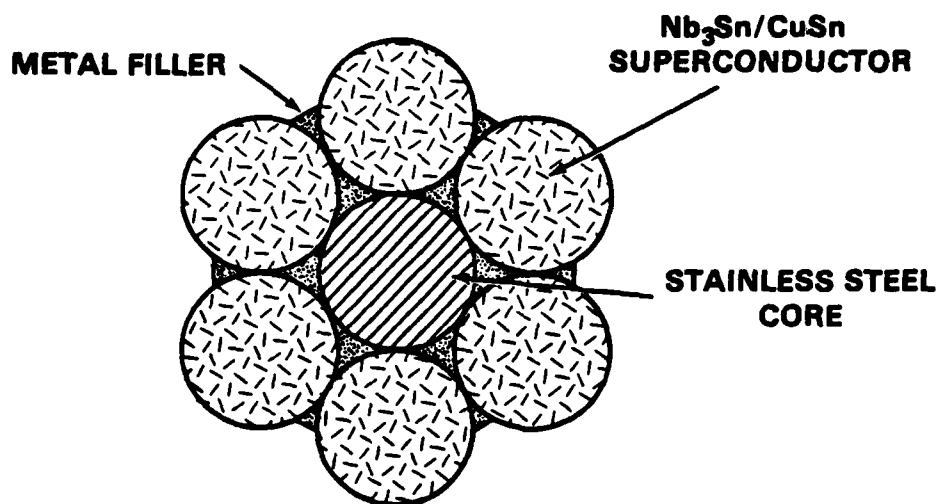


<b>OVERALL DIAMETER</b>	<b>0.457 mm</b>
<b>STRAND SIZE</b>	<b>0.152 mm</b>
<b>CuSn/SUPERCONDUCTOR RATIO</b>	<b>~2.5 TO 1</b>
<b>NO. OF FILAMENTS (6 X 240)</b>	<b>1440</b>
<b>FILAMENT DIAMETER</b>	<b>~ 6 <math>\mu</math>m</b>

**Figure 1 - Cross-Sectional View of Nb<sub>3</sub>Sn/CuSn Superconducting Wire**

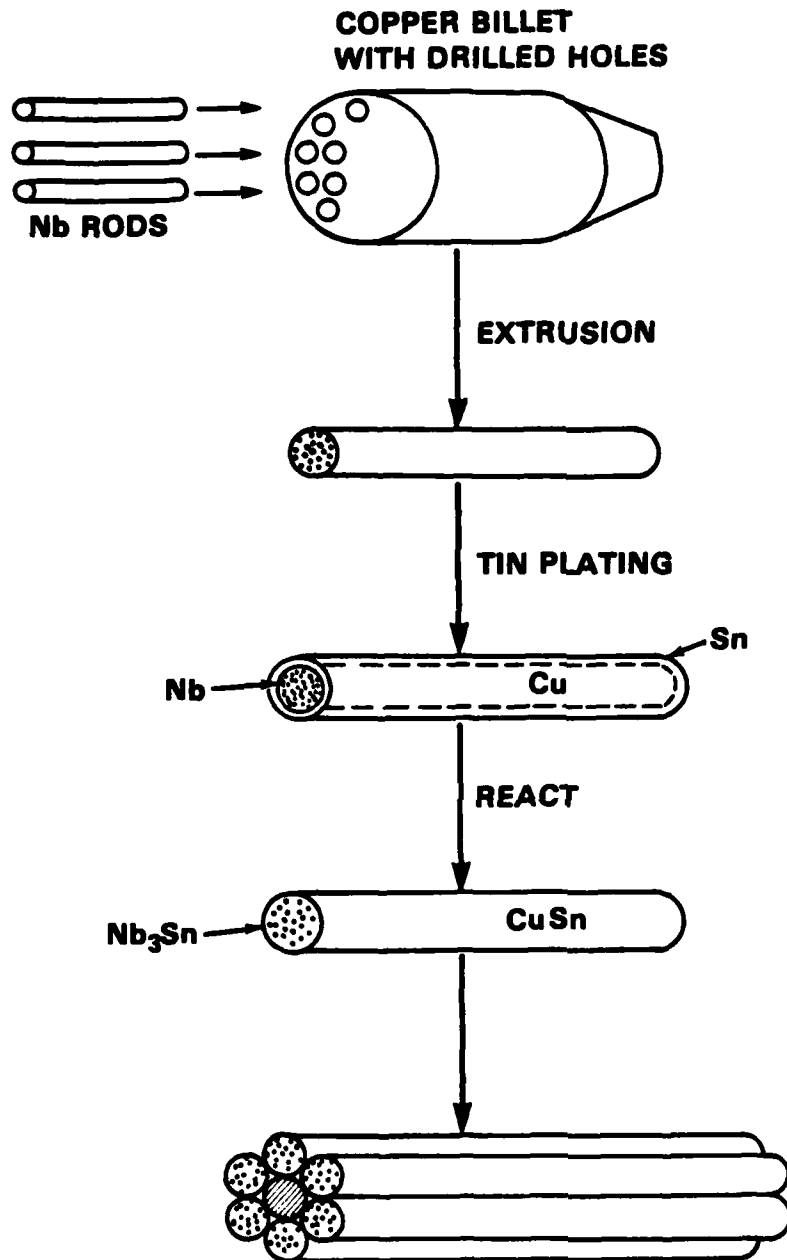

**Figure 2 - Nb<sub>3</sub>Sn/CuSn Superconducting Wire Fabrication Process**



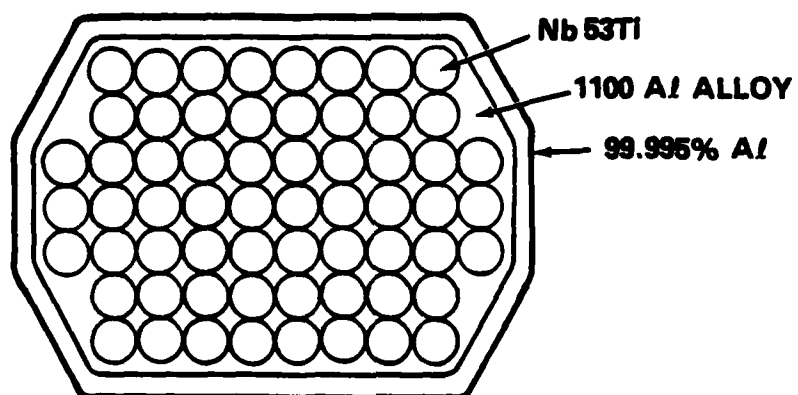

<b>CROSS-SECTIONAL SIZE</b>	<b>0.635 m × 0.889 mm</b>
<b>Al/SUPERCONDUCTOR RATIO</b>	<b>2.5 TO 1</b>
<b>NO. OF FILAMENTS</b>	<b>121</b>

Figure 3 - Cross-Sectional View of NbTi/Al Superconducting Wire


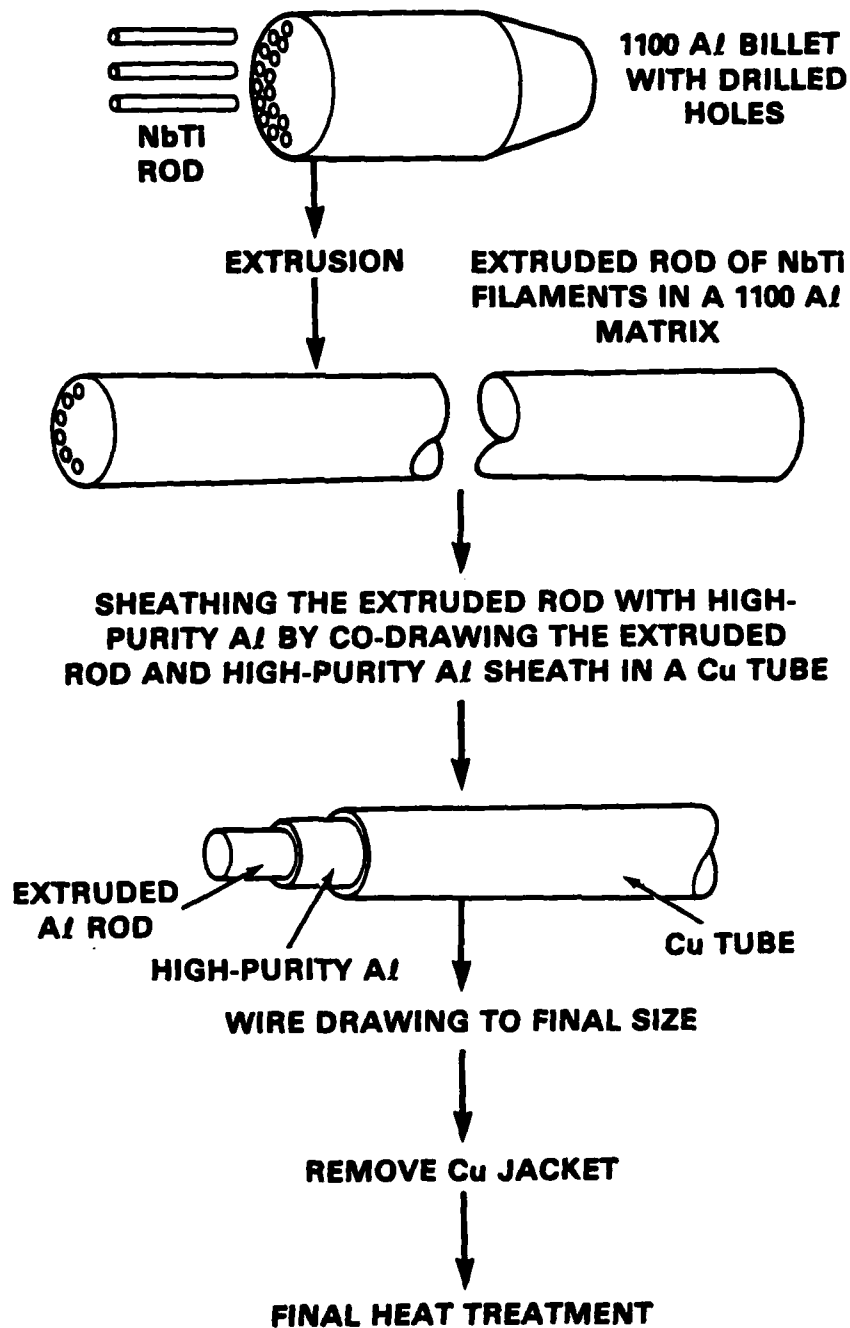


Figure 4 - NbTi/Al Superconducting Wire Fabrication Process

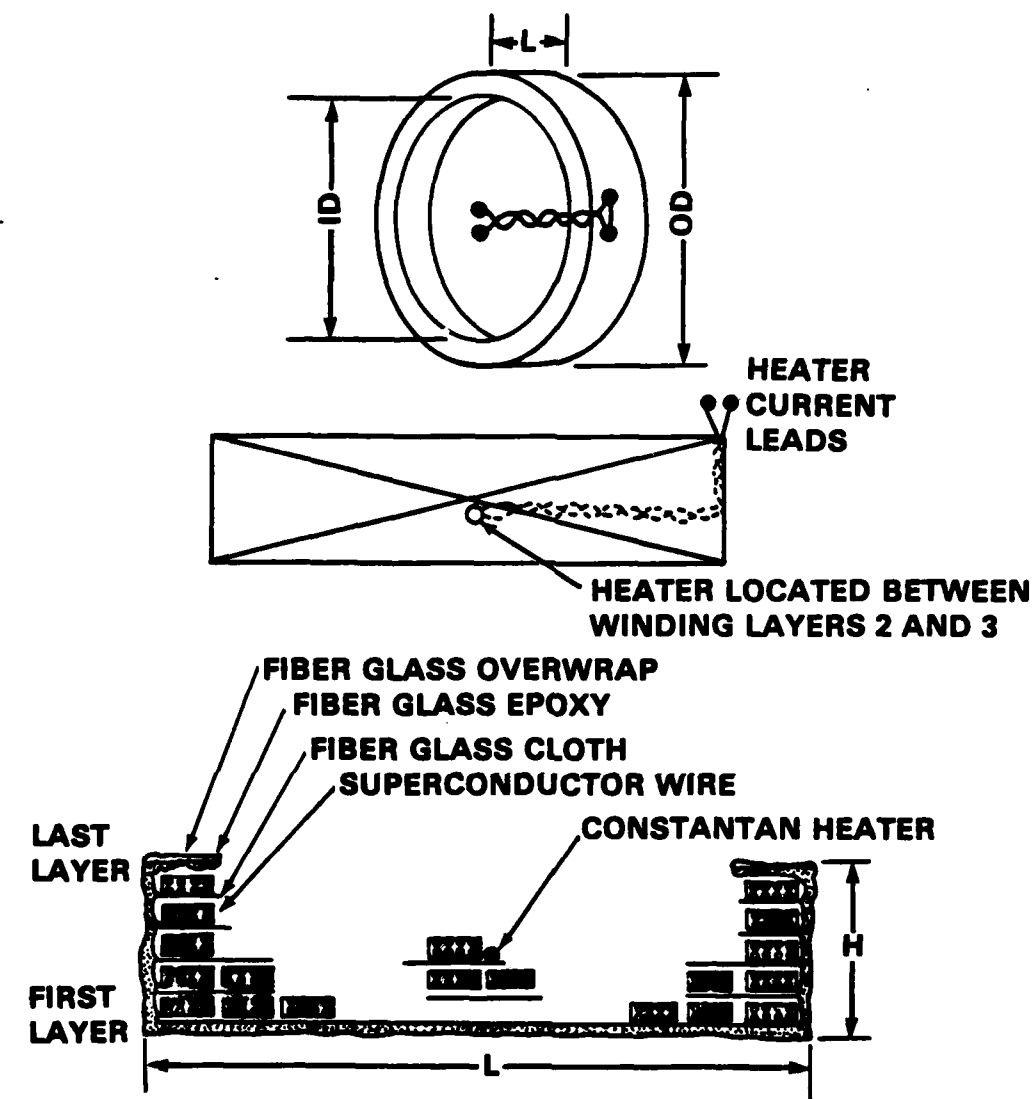

TEST COIL	ID (cm)	OD (cm)	L (cm)	H (cm)	N
Nb <sub>3</sub> Sn/CuSn	18.00	18.81	1.40	0.405	104
NbTi/Al	18.00	19.00	1.40	0.50	47
NbTi/Cu	18.00	18.76	1.40	0.38	88

Figure 5 - Superconducting Test Coil Construction and Heater Location

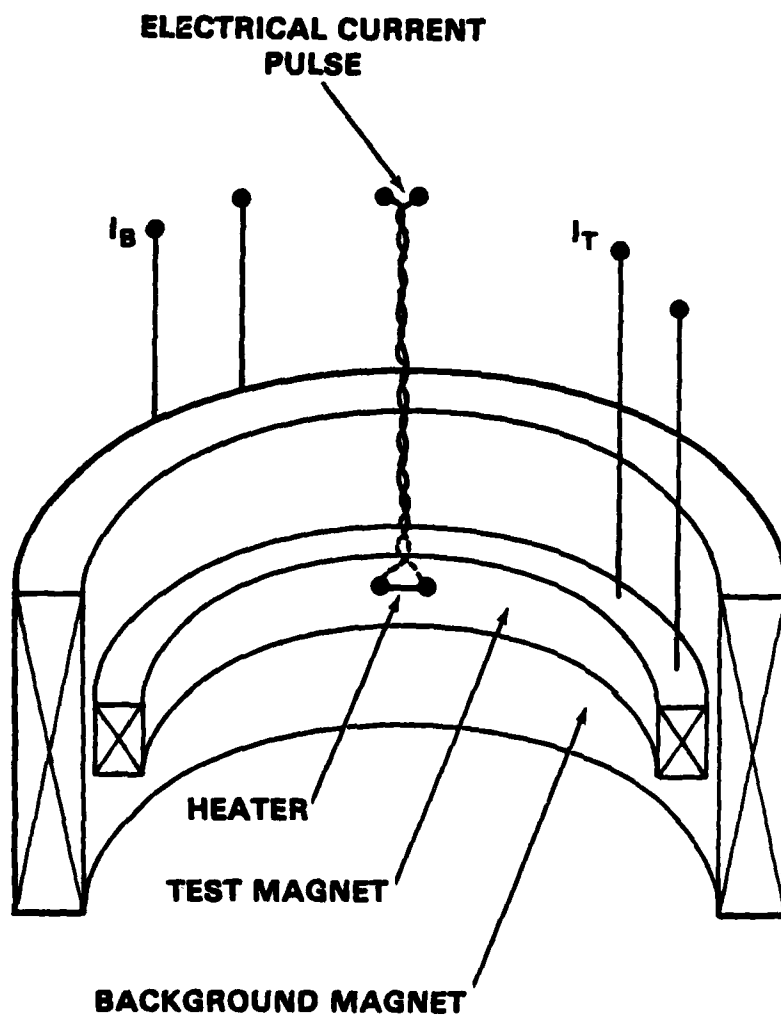


Figure 6 - Magnet Assembly for Energy-to-Quench Measurements

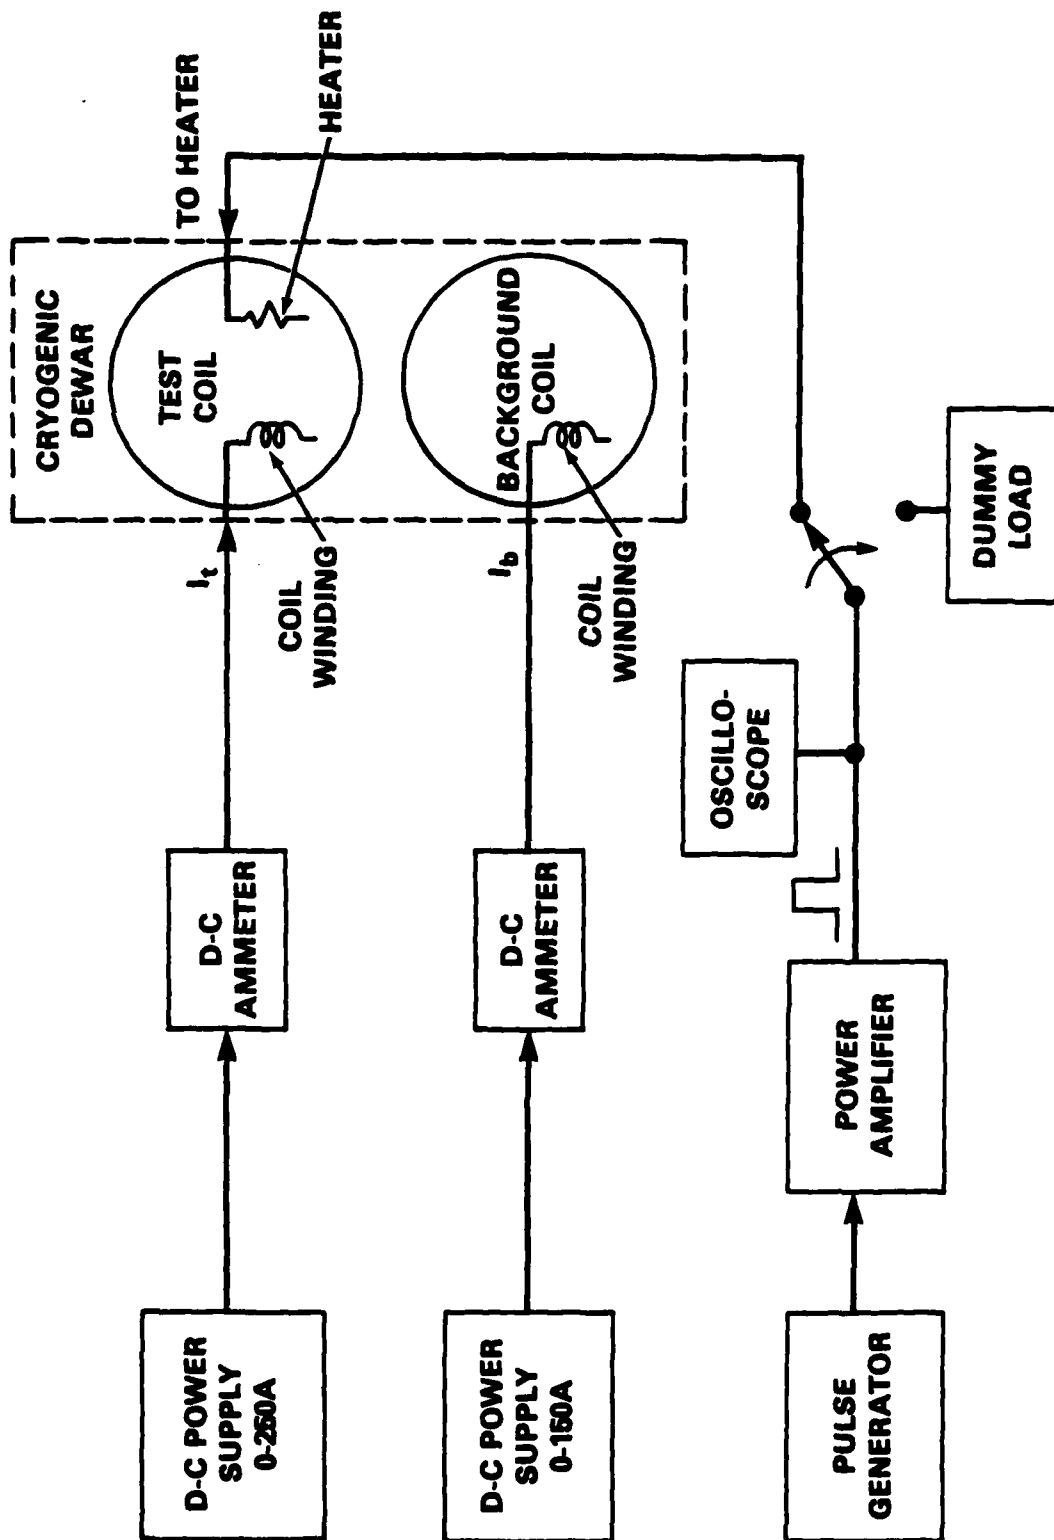


Figure 7 - Experiment Instrumentation and Power Supply Connection Diagram

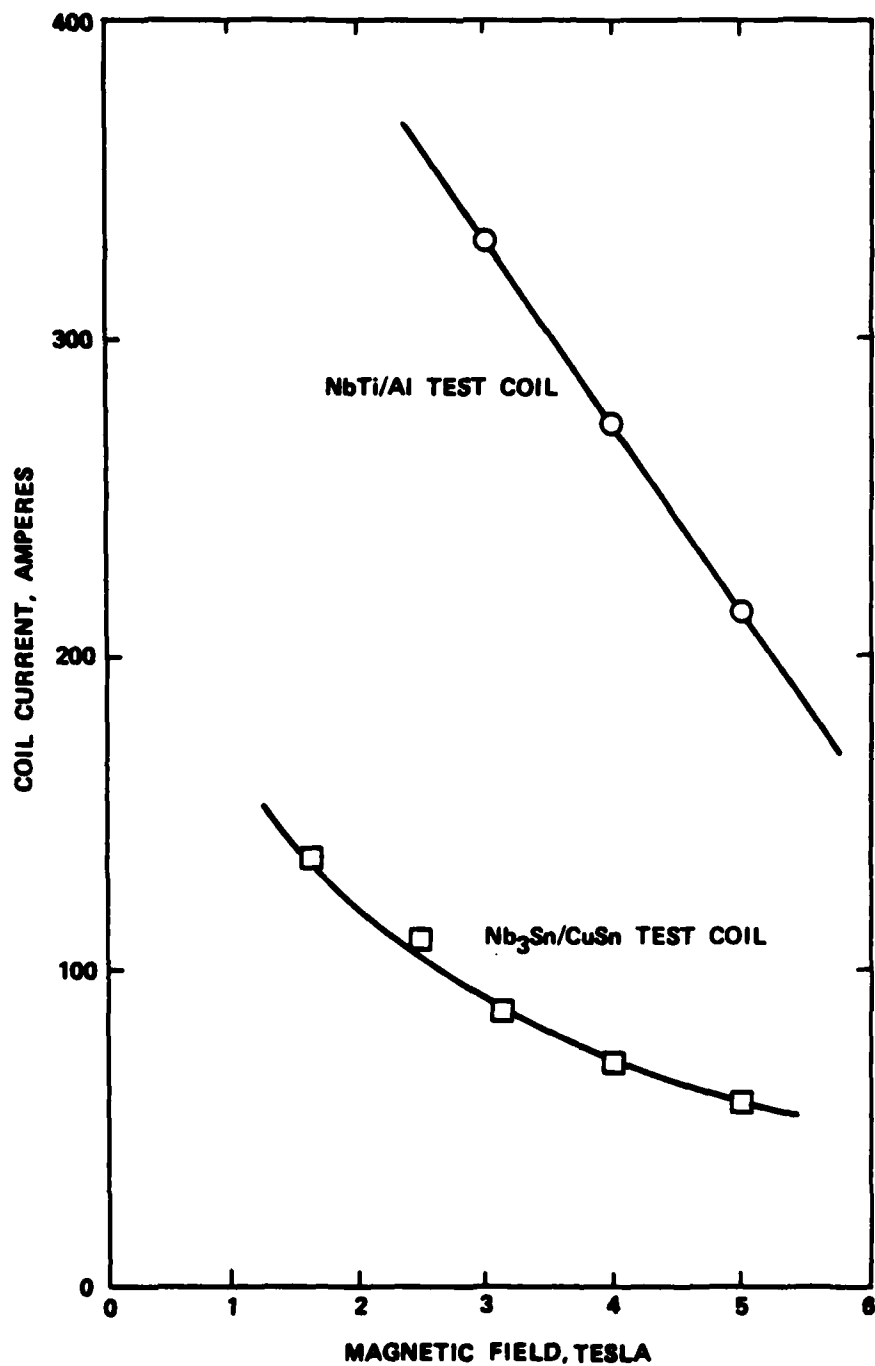


Figure 8 - Critical Current ( $I_c$ ) Measurement Results for the NbTi/Al and Nb<sub>3</sub>Sn/CuSn Test Coils

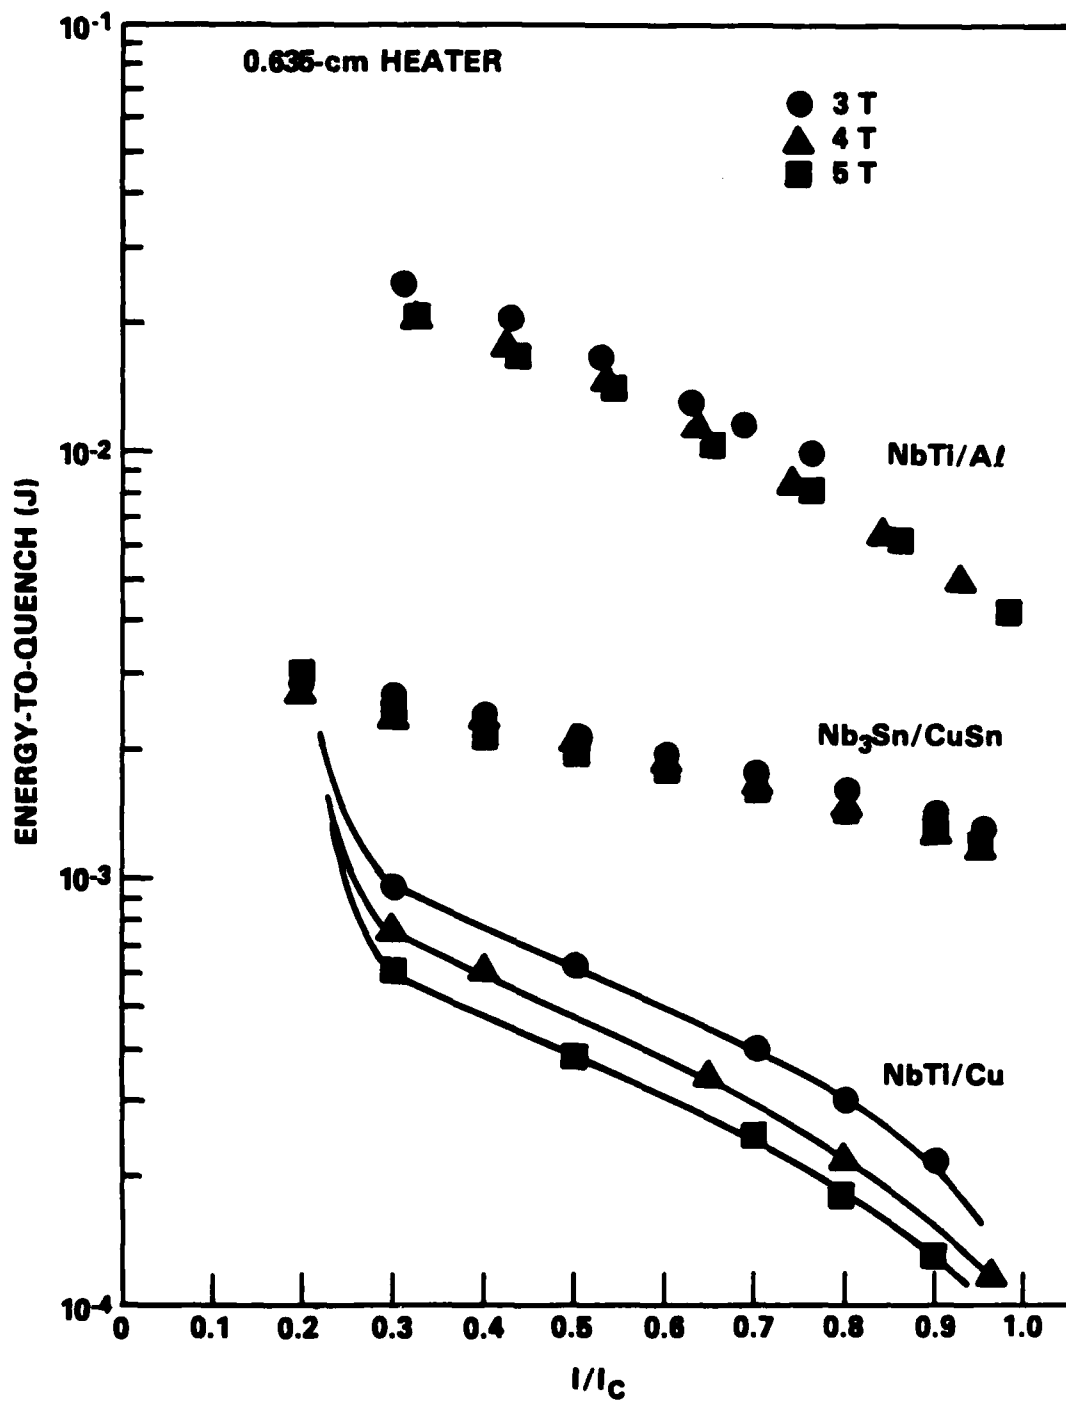


Figure 9 - Energy-to-Quench Versus  $I/I_c$  for Nb<sub>3</sub>Sn/CuSn, NbTi/Al, and NbTi/Cu Test Coils

#### REFERENCES

1. Superczynski, M.J., "Heat Pulses Required to Quench a Potted Superconducting Magnet," IEEE Transactions on Magnetics, Vol. Mag-15, No. 1 (Jan 1979).
2. Waltman, D.J., et al, "Energy Pulses Required to Quench Potted Superconducting Magnets at Constant Field," IEEE Transactions on Magnets, Vol. Mag-17, No. 1 (Jan 1981).
3. Young, M., "Fabrication and Properties of an Aluminum-Stabilized NbTi Multifilament Superconductor," Advances on Cryogenic Engineering, K.D. Timmerhans, et al, eds., New York, Plenum Press, Vol. 24, pp. 383-388 (1978).



# INITIAL DISTRIBUTION

## Copies

5 NAVSEA  
 1 SEA 03R  
 1 SEA 05R11  
 1 SEA 5432  
 2 SEA 99612

2 ONR  
 1 Code 410  
 1 Code 414

12 DTIC 

1 Westinghouse Electric Company  
 R&D Center  
 1310 Beulah Road  
 Pittsburgh, PA 15235  
 Attn: D.L. Green

1 General Electric Company  
 Corporate R&D  
 P.O. Box 43  
 Schenectady, NY 12301  
 Attn: R.A. Marshall

1 AiResearch Manufacturing Company  
 2525 West 190th Street  
 Torrance, CA 90509  
 Attn: W. Rumer

## CENTER DISTRIBUTION

Copies	Code
2	271
20	2712
1	522.2
2	5231

PRECEDING PAGE BLANK-NOT FILMED

### **DTNSRDC ISSUES THREE TYPES OF REPORTS**

1. DTNSRDC REPORTS, A FORMAL SERIES, CONTAIN INFORMATION OF PERMANENT TECHNICAL VALUE. THEY CARRY A CONSECUTIVE NUMERICAL IDENTIFICATION REGARDLESS OF THEIR CLASSIFICATION OR THE ORIGINATING DEPARTMENT.

2. DEPARTMENTAL REPORTS, A SEMIFORMAL SERIES, CONTAIN INFORMATION OF A PRELIMINARY, TEMPORARY, OR PROPRIETARY NATURE OR OF LIMITED INTEREST OR SIGNIFICANCE. THEY CARRY A DEPARTMENTAL ALPHANUMERICAL IDENTIFICATION.

3. TECHNICAL MEMORANDA, AN INFORMAL SERIES, CONTAIN TECHNICAL DOCUMENTATION OF LIMITED USE AND INTEREST. THEY ARE PRIMARILY WORKING PAPERS INTENDED FOR INTERNAL USE. THEY CARRY AN IDENTIFYING NUMBER WHICH INDICATES THEIR TYPE AND THE NUMERICAL CODE OF THE ORIGINATING DEPARTMENT. ANY DISTRIBUTION OUTSIDE DTNSRDC MUST BE APPROVED BY THE HEAD OF THE ORIGINATING DEPARTMENT ON A CASE-BY-CASE BASIS.

FILMED  
5-8